




MSM-42F0037MPA

SKU: 217646

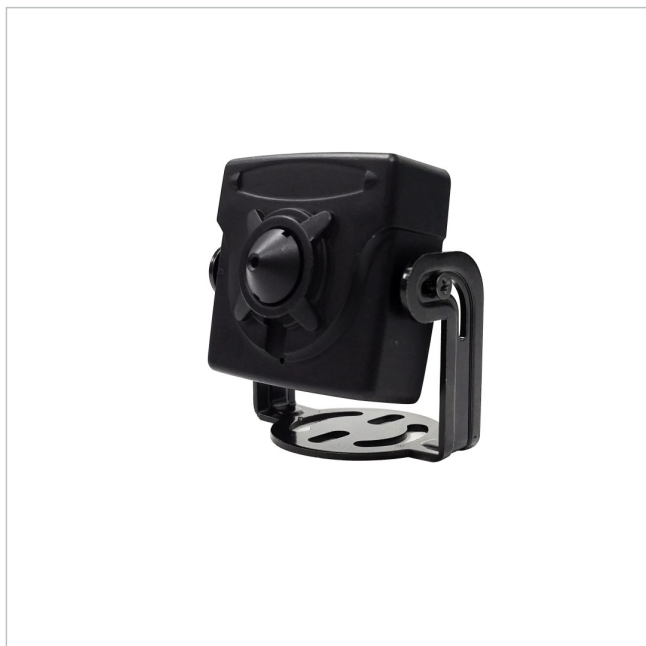

1/2.8" HD Board Camera, Colour, 1920x1080, 3.7mm, Pinhole, WDR, Housing, 12VDC

Main Features

- 1/2,8" 2 Megapixel SONY STARVIS CMOS-Sensor
- Board Camera with rugged metal cabinet
- Resolution max. 1920x1080 (Full HD)
- Separate outputs for digital and multi-signal
- Multisignal: HD-TVI, AHD, CVI and Composite selectable

- Digital signal: EX-SDI, HD-SDI selectable
- Pinhole lens 3.7mm
- Electronic Day/Night function
- ROI (Region of Interest) WDR mode
- Integrated motion detector, defog, privacy zones

Specifications

Dimensions (HxWxD)	37x37,8x21,5mm
Series	eneo COAXIZE
Camera Type	Platinenkamera
Resolution Pixels	1280x720, 1920x1080, 720x576
System	colour
Sensor size	1/2.8"
Imager	CMOS
Day&Night Switch	no
Sensitivity	0,08 Lux
Sensitivity 2	40IRE, at F1.4
Low Speed Shutter	yes
Backlight Compensation	BLC, HLC

MSM-42F0037MPA

Continuation of the specifications

Wide Dynamic Range (WDR)	WDR 113dB
Motion Detector	yes
Lens Type 2	fixed focal length
Focal Length	3,7 mm
Iris Control	no
Digital Zoom	no
Horizontal Angle of View	82°
Vertical Angle of View	42°
Housing	Indoor
Color (housing)	black
Housing material	Metal
Video outputs	AHD, composite (CVBS), CVI, EX-SDI, HD-SDI, HD-TVI
Alarm inputs	no
Alarm outputs	no
Serial interfaces	Coaxitron (HD Protocol)
Mounting_4	Ceiling mount, Wall mount
Supply voltage	12VDC
Power consumption	1.8W
Operating temperature	-10°C ~ +50°C
Signal format	AHD @ 2MP, Composite (FBAS), CVI @ 2MP, EX-SDI (270 Mbps), HD-SDI (1.485 Gbps), HD-TVI @ 2MP
Camera built	Modul
Frame Rate	25/30fps @ 1920x1080p, 50/60fps @ 1280x720p
Weight	110g
Manufacturer order number	217646

Optional Accessory

SKU	Name	Description
225085	MAM-5DC1004M0A	Distributor, 1x BNC Input HD-TVI, CVI, AHD, CVBS, 4x BNC Output
220299	MAM-5MM1001M0A	Converter, HD-CVI, HD-TVI, AHD, Composite to HDMI, VGA, Composite, Indoor
236125	MAM-5MM2203M0A	Converter, 4K HD-TVI, HD-CVI, AHD, auf HDMI, Indoor 12VDC
218653	PS12DC-11	Plug-in Power Supply Unit, 100-240VAC/12VDC (1,0A), regulated, with DC Plug
212984	TVA-1201TRA	UTP Transmitter+Receiver, UTP, BNC, 250m, Indoor, HD TVI CVI, AHD, CVBS, Active, 12V
212985	TVA-1201TRP	UTP Transmitter+Receiver, UTP, BNC, 150m, Indoor, HD TVI CVI, AHD, CVBS, Passive

MSM-42F0037MPA

Continuation of accessory

Optional Services

SKU	Name	Description
229233	CON-KAM-AKON	Preconfiguration 1x analog camera Function test, FW update

Your contact person

SLD Security & Communications Ltd.
101 Eden Grove Road
KT14 7PX Byfleet Surrey
GB
Tel: +44.7973112104
E-Mail: enquiries@sld.uk
Web: www.sld.uk



SLD Security & Communications
Secure by Design